

Charminglite

SK9822 dream color LED Strip





*LED Chip is built in IC, then the components is less, pixels can be high, can make attractive appearance and so on.

*IC is designed with double the signal, a data line, a clock line, two power lines, 256 gray scale, high brightness, fast data transfer, fast screen refresh


*Each lamp bead forms a loop, can be arbitrarily cut according to the length of the loop, without damaging other parts

RGB



CE

RoHS

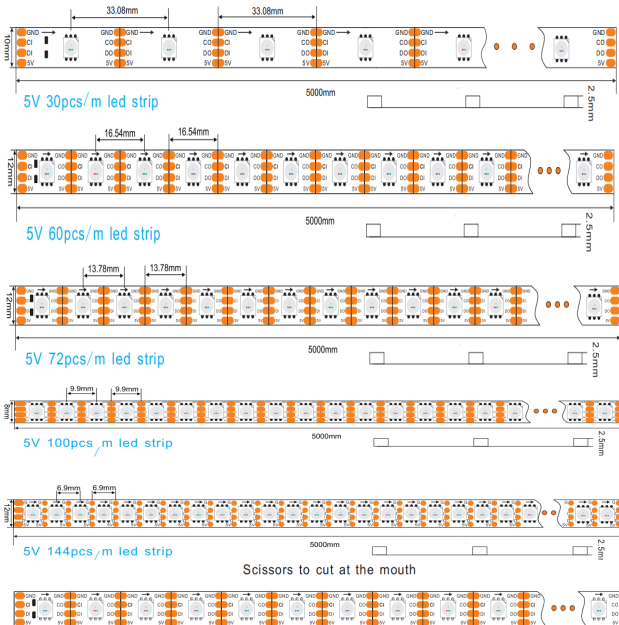

Application

Part No.	Voltage	Wattage	PCB Width	LED Qty/M	Cutting Intervals	Color Temp.	Light Output IP20	CRI	Standard Length
CL-9822-30-5V	5V DC	9.6W/M	10MM	30LEDs/M	33.08mm(5V)	RGB	N/A	N/A	5 Meters/Reel
CL-9822-60-5V	5V DC	18 W/M	12MM	60LEDs/M	16.54mm(5V)	RGB	N/A	N/A	5 Meters/Reel
CL-9822-72-5V	5V DC	21.6W/M	12MM	72LEDs/M	13.78mm(5V)	RGB	N/A	N/A	5 Meters/Reel
CL-9822-100-5V	5V DC	30 W/M	8MM	100LEDs/M	9.9mm(5V)	RGB	N/A	N/A	5 Meters/Reel
CL-9822-144-5V	5V DC	43.2W/M	12MM	144LEDs/M	6.9mm(5V)	RGB	N/A	N/A	5 Meters/Reel